


SR. NO.	DESCRIPTION	UNIT	Qty.	Rate	Amount
A	SANITARY FIXTURES & CP FITTINGS:-				
	NOTES:-				
	General Notes: 1) Detail of sanitary fixture are for the information of the contractor only. However model / makes of all sanitary fixture shall be selected by Clinet / interior team and the same shall be binding for execution. 2) No additional fixing cost shall be paid for change in type of sanitary fixture or fitting. 3) Provision of extension piece for final connection of CP fitting shall be supplied and installed by the contractor accordingly (as required). 4) For make of any item refer list of approved makes as given in technical specifications. 5) The rate shall include cost of raw materials, labour, loading and unloading, transportation, scaffolding and all other incidental charges etc., with all leads and lifts, complete as per specifications, drawings and as directed by the Engineer-in-charge. 6) All required civil work shall be measured and paid in relevant items. (If not specified in item description). 7) The rate quoted shall be applicable for all floors, all heights and all places. 8) All gaps between wall / floor and sanitary vessels shall be filled with sanitary grade sealant. 9) CP Brass or SS screws shall be used for fixing sanitary fixtures and accessories in toilet, bath, pantry and kitchen area As per recommendation finalized model company guidelines. 10) All fixtures flow rates as per IGBC Guidelines 11) Any other item required for satisfactory installation shall be in the scope of contractor FOC. 12) All Sanitary Fixtures & CP Fittings with all fittings and accessories will be supplied by owner / Client Free of cost.				
1.0	Supply, Fixing, Testing and Commissioning wall hung type white vitreous china European water closet with concealed 'P' or 'S' trap, seat & lid (heavy duty) C.P. brass hinges, including C.I. chair, with chair grouting, rubber buffers, C.P. nuts, bolts, etc. including accessories CI / MS brackets painted with two coats of approved shade over a coat of primer, C.P. Brass screws and wooden cleats.				7500.00
2.0	Supply, Fixing, Testing and Commissioning C.P. brass Ablution health faucet assembly comprising hand held shower with 8 mm dia flexible tube with mounting bracket fixed on wall complete.	No.	3	250	750.00
3.0	Supply, Fixing, Testing and Commissioning of concealed flushing cistern with or without Frame with dual flushing actuator plate, flush stop function noise less float valve and fast filling action with all component parts of high quality complete in all respects. Rates to be included considering chasing in the wall as required and making good the same with appropriate mortar.	No.	3	1000	3000.00
4.0	Supply, Fixing, Testing and Commissioning white glazed vitreous China wash basin (under / over the counter / Semi recessed) with 32 mm dia C.P brass waste of standard pattern, 32 mm dia C.P cast brass bottle trap and union, 32 mm dia C.P brass pipe to wall and CP wall flange, and rubber acceptors for waste connection, R.S. or C.I. painted brackets bolts, nuts etc. (Cutting, finishing, making holes in Stone/wood shall be in civil / Interior contractor's scope), In case of fixing in stone, will be fixed by civil / Interior contractor.	No.	3	1350	4050.00
4.1	Under / over the counter / Semi recessed				
5.0	Supply, Fixing, Testing and Commissioning of Wall / Table mounted C.P. Brass single lever basin mixer/ pillar cock with ss flexible connection and brass nuts complete.	No.	3	600	1800.00
9.0	Supply, Fixing, Testing and Commissioning of 15 mm dia C. P. Brass angle valve with C.P. brass	No.	8	200	1600.00
10.0	Supply, Fixing, Testing and Commissioning of recessed type stainless steel toilet paper holder of approved makes. Including cutting hole in the masonry/R.C.C wall and making good with cement mortar.	No.	3	250	750.00
10.1	Size 150 mm x 150 mm				
18.0	Supply, Fixing, Testing and Commissioning of C. P. Brass concealed mixer / Divertor & wall flange (for shower) including necessary fittings/ accessories, exposed part including cutting & making good the wall wherever required.	No.	1	1000	1000.00
19.0	Supply, Fixing, Testing and Commissioning of revolving type head shower & shower arm.				




SR. NO.	DESCRIPTION	UNIT	Qty.	Rate	Amount
19.1	Shower Head	No.	1	250	250.00
19.2	shower arm.	No.	1	70	70.00
• 20.0	Supply, Fixing, Testing and Commissioning of Spout / bib tap.	No.	1	250	250.00
• 30.0	Providing and fixing Heavy class SS single piece grating 150 x 150 mm size of approved make, including setting in floor with cement mortar to match with floor finish as per architect requirements.	No.	4	400	1600.00
TOTAL OF SECTION-A SANITARY FIXTURES & CP FITTINGS CARRIED OVER TO SUMMARY					22620.00
B	WATER SUPPLY :				
	WATER SUPPLY (INTERNAL & EXTERNAL) :				
1.0	CPVC Pipe Internal :				
1.1	Providing and fixing, to wall, ceiling and floor, approved quality, CPVC SDR 11 pipes and fittings, conforming to ASTM D 2846, for sizes upto 50 mm and Sch 80 piping for sizes above 50 mm conforming to ASTM F441, for hot and cold water supplies for all Internals including jointing with CPVC solvent cement and ensuring airtight joints, with necessary specials, couplers, unions, elbow, equal tees, tail piece, adapter (both male and female), reducer (single stage, double stage and triple stage), end cap, fabricated bend, etc., including testing, cutting and chasing in wall and floors with diamond cutter & making good the same by using 1:1 cement mortar over the fiber mesh (Chases will be measured along the centre line of the installed pipe), ceiling and floor etc. complete of the following nominal pipe size: In case of requirement of structural steel supports/ excavation/ encasing, shall be paid separately				
	Galvanised rubber sleeved clamps/ u bolts, brackets, passivated fasteners & legend boards shall be included in the price				
1.1.2	20 mm (NB)	Rmt.	30		
2.0	CPVC Pipe External (For Shaft, Terrace, Basement) :				
2.1	Providing and fixing, to wall, ceiling and floor, approved quality, CPVC SDR 11 pipes and fittings, conforming to ASTM D 2846, for sizes upto 50 mm and Sch 80 piping for sizes above 50 mm conforming to ASTM F441, for hot and cold water supplies for all Internals including jointing with CPVC solvent cement and ensuring airtight joints, with necessary specials, couplers, unions, elbow, equal tees, tail piece, adapter (both male and female), reducer (single stage, double stage and triple stage), end cap, fabricated bend, etc., including testing, cutting and chasing in wall and floors with diamond cutter & making good the same by using 1:1 cement mortar over the fiber mesh (Chases will be measured along the centre line of the installed pipe), ceiling and floor etc. complete of the following nominal pipe size: In case of requirement of chasing in walls, structural steel supports/ excavation/ encasing, shall be paid separately				
	Galvanised rubber sleeved clamps/ u bolts, brackets, passivated fasteners & legend boards shall be included in the price				
2.1.3	25 mm (NB)	Rmt.	45	615	27675.00
2.1.5	40 mm (NB)	Rmt.	51	950	48450.00
10.0	Providing and fixing full way lever operated forged brass body quarter turn lever operated ball valve with forged brass hard chrome plated ball, including necessary nipple, coupling, union etc. (For cold /hot water supply/flushing water supply)				
10.3	25 mm dia	No.	8	1600.00	12800.00
• 10.5	40 mm dia	No.	4	3800.00	15200.00
• 10.6	50 mm dia	No.	4	1500.00	6000.00
14.0	Supplying and fixing Prayag make High Pressure rated PVC ball float valve with and brass rods of required length suitable for Test pressure of not less than 10 kg/sq cm. of the following sizes.				
14.1	25 mm dia				
	TOTAL OF SECTION-B WATER SUPPLY (INTERNAL & EXTERNAL) CARRIED OVER TO SUMMARY				128375.00
C	INTERNAL & EXTERNAL SEWAGE/DRAINAGE NETWORK:				

22/69

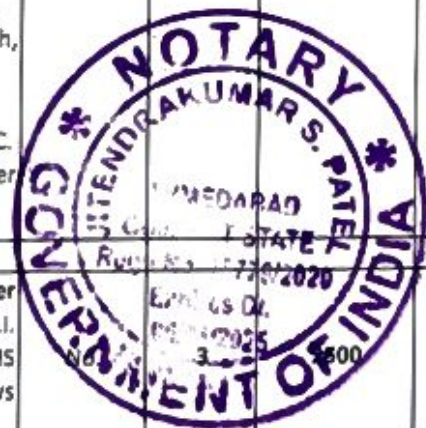

NO.	DESCRIPTION	UNIT	Qty.	Rate	Amount
3	Ultra Silent pipes & fittings Providing and fixing soundproof Multilayer Polypropylene piping system as per EN 1451-Part 1-6 with 3 layer pipe made of PP + PP-MD + PP and one layer fittings in PP MD, push-fit type, Halogen and Calcium free, having high impact resistance as per DIN EN ISO 291:2008-08, Ring stiffness SN6 6KN/m² as per ISO 9969, offering sound levels of 19 dBA as per EN 14366 at a flow rate of 4 l/s, water tightness as per EN 1451-1 minimum of 0.5 bar for 15 minutes, density of pipe = 1.15gms/cm³, elongation = 0.09mm/mn/K and E modulus 2300-3000 as per ISO 178, along with factory fitted EPDM lip ring, Fire Behavior Classification according to EN 13501-1:2009 & classified D-s2-d2 (EN 13501-1), meets the requirements of EN 4102-2 with Fire Classification B2, Smoke Development Category Q1 & Drip Formation category TR1. Inclusive of all necessary specials like bends, tees, clean out plug, offsets, junctions, door piece, cop, cleanouts etc., laid under the slabs/ Walls with suitable clamps, Pedestals and specials curing etc., complete. Fabricated GI bracket of suitable size to be provided for pipes, Galvanised rubber sleeved clamps/ u bolts, brackets, passivated fasteners & legend boards shall be included in the price (suspended plumbing, plumbing Shaft & basement) All types of Fittings, Bends and pipes rate should be inclusive in item rate. In case of requirement of structural steel supports/ excavation/ encasing, shall be paid separately				
3.1	40mm	Rmt.		920	
3.2	50mm	Rmt.	10	970	9700
3.5	110mm	Rmt.	77	1680	129360
4	Providing and laying non-pressure Structured Wall Foam Core UPVC Pipes as per IS: 16098 Class SN8, with unsmooth outer and smooth inner layers of the pipe of UPVC material as per IS: 15328 and UPVC foam, for underground sewerage & drainage applications as per IS: 16098 (P2) without sockets plain pipes, and as per the following diameter (nominal), including all fittings like bends, tees, Y joints, couplers, etc., joined by manufacturer's recommended solvent cement, including cutting the pipes to required lengths, including excavation, refilling, fixing the pipes with bedding of 150mm PCC of 1:4:8 mix (1 cement: 4 coarse sand: 8 graded stone aggregate of 40mm nominal size) at slopes as mentioned in the drawings, drilling of holes in walls as required, and as directed by the Engineer-in-Charge.				
4.1	160mm	Rmt.	46	1950	89700
6	Providing, fixing, jointing and testing Ultra- Silent Multitraps made of Soundproof Multilayer Polypropylene piping system as per EN 1451-Part 1-6 with 3 layer pipe made of PP + PP-MD + PP and one layer fittings in PP MD, push-fit type, Halogen and Calcium free, having high impact resistance as per DIN EN ISO 291:2008-08 traps of self cleansing design with water seal not less than 50 mm. The traps shall be used for suspended piping system, Inclusive of Height Riser Extension piece of 350mm length & without gratings.				
6.1	110 mm Multitrap (single 75mm outlet and three 50 mm outlets)	No.	8	1500	12000
6.2	110 mm "P" Trap	No.	6	1200	7200
7	Providing, fixing, jointing and testing PVC - CLEAN OUT PLUG	No.			
7.1	160 mm				
9	Supplying, fixing, testing and commissioning Polypropylene multi inlet connection / Height riser / Hopper (3 or 4 nos. of 50mm dia pipe inlet) made of 110mm dia pipe to be fixed with inlet of "P" trap or Floor trap. Excess connections to be plugged with solid endcap. Inlet to be protected of dust entry with endcap.	No.	3	650	1950
10	Earth Work in Excavation of required width for water supply, storm water, sewerage pipes at bottom depth upto 1.5 m including getting out the excavated soil and then returning the soil as required in layer disposing of surplus excavated soil as directed within a lead of 50 m for all kinds of soil.	Rmt.	124	350	43400
1.1	Pipes, exceeding 80 mm dia but not exceeding 300 mm dia.	Rmt.		650	
1.2	Pipes, exceeding 300 mm dia but not exceeding 600 mm dia.				
20	Providing and fixing rain water "KHURRAS" size 450 x 450 mm required depth with lead flashing around rainwater pipe with one piece lead sheet of 3 mm thick set on a layer of cold bitumen. Including heavy duty CI grating complete as required.	No.			
	300 X 300 mm 50mm DEPTH		8	800	6400

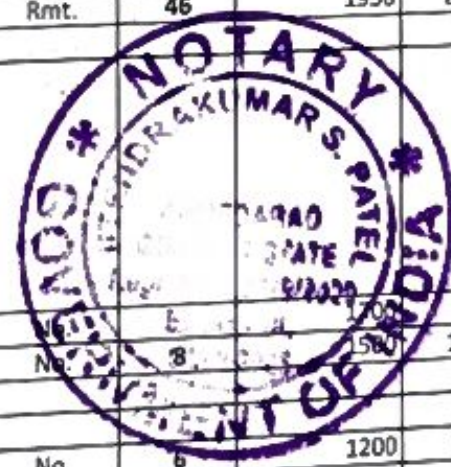

MA41 MM

SR. NO.	DESCRIPTION	UNIT	Qty.	Rate	Amount
22	Supplying and laying Single wall corrugated PVC Perforated sub-surface drainage pipe Manufactured as per IS 9271 - 2004 pre-wrapped Geo-Textile filter made from minimum 2.5mm th. and weight not less than 250 GSM Polyester fiber including required fittings Confirming to IS 9271 with laying of 300 GSM GEO textile and wash stones (size- 20mm to 40mm including necessary excavation (minimum 600mm wide and 600mm deep) or/and as shown in the drawing or as per direction of engineer in charge. (Sequential methodology to be followed) including back filling if required. Surplus soil to be shifted within 100 mtr. distance or as directed by E-I-C. with necessary arrangement to connect with rigid PVC pipe wherever required.				
22.1	160mm Dia	Rmt.		1800	
22.2	110mm Dia	Rmt.	48	1250	60000.00
	TOTAL OF SECTION-C INTERNAL SAVAGE/DRAINAGE NETWORK CARRIED OVER TO SUMMARY				359710
D	PUMP ROOM :				
1.0	Installation of pumps				
	Erection of submersible/ water supply Pumps. (Labour Only - Flexible pipe, hose clamps will be supplied by client free of cost. Valve, NRV or any other accessories, charges for unloading, shifting shall be paid separately in relavent items). Without electrical/Automation work				
1.4	HPN SYSTEM PUMP (1W+1S)	Set	1	6000	6000.00
	TOTAL OF SECTION-D PUMPROOM CARRIED OVER TO SUMMARY				6000
E	MISCELLANEOUS :				
	WATER TANK COVER				
1.0	Providing and fixing 600 mm dia FRP covers of 12.5T load bearing capacity water tank cover fixed with cement mortar as required.	No.	4	8250	33000.00
9.0	SEPTIC TANK	No.	1		33000
	TOTAL OF SECTION-E MISCELLANEOUS : CARRIED OVER TO SUMMARY				
#	ONLY INSTALLATION COST FOR ALL PUMPS CONSIDERED.				
#	10% CONTIGENCY SHOULD BE CONSIDER				
#	ANY TYPE OF ELECTRICAL WORK NOT INCLUDED IN ABOVE BOQ				
#	ITEM QUANTITY AS PER TILL DATE GFC/SCHEMATIC DRAWING.				

